



Volume 3.6 November 2008

Anchoring Below Harness Back D-ring w/Miller TurboLite[™] and Twin Turbo[™] Fall Protection Systems

After extensive testing, Sperian Fall Protection has approved the Miller TurboLite PFLs and Miller Twin Turbo Systems for the applications illustrated below:

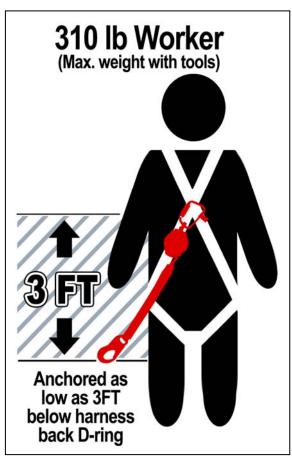

• No other shock-absorber is needed for either the TurboLite or Twin Turbo System. The external shock absorber (on the lifeline) does not deploy.

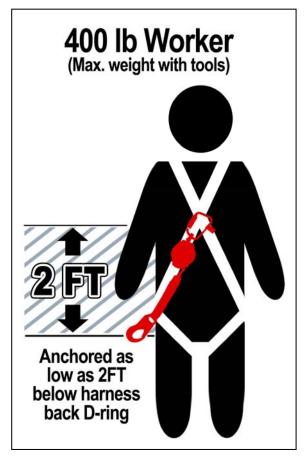

• The TurboLite and Twin Turbo System external shock-absorber (on the lifeline) can deploy up to approximately 12-inches.

