





# 30 Spun-bond Socks in Chemical

**30YS34-SB**

Socks | Spun-bond | Flake | Chemical

**Absorbency:** 82 Litres | 21.75 US Gallons of oil\*\*  
98 Litres | 25.9 US Gallons of water\*\*

**Base Fibre:** Super Absorbent Flake

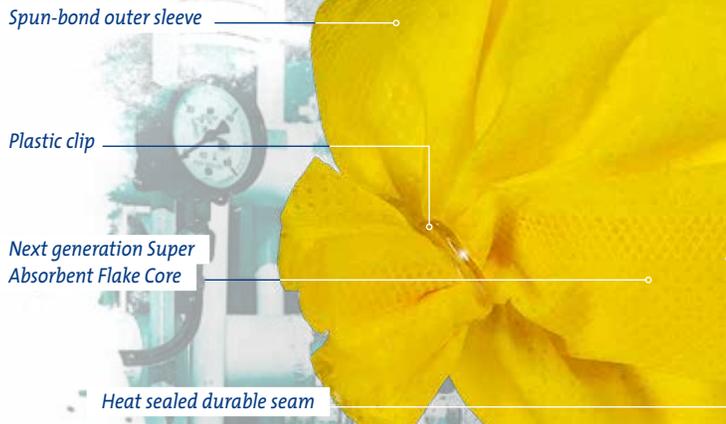

Product Code	Colour	Format	Size cm(inches)	Recycled Content	Units/Case	Weight/Case***	LTL/Pallet	FTL/Pallet
<b>Chemical</b>								
30YS34-SB	Yellow	Sock	8 cm x 1.2 m (3" x 4')	95%*	30/ box	14.5 kg (32 lbs)	20	20



*This product is in a Chemical format*



*This product features recycled fibres*



*This product comes in a long box and contains 30 socks*

These socks are 1.2 metres in length and eight centimetres in diameter. There are 30 socks in the branded cardboard box. The socks feature a spun-bond outer sleeve that has a durable heat sealed seam running its entire length. This tube is then filled with a next generation absorbent core that will absorb both oil-based and water-based fluids. The absorbent core is secured into the sleeve at each end with a durable plastic clip.

Chemical socks are designed to contain small hazardous, toxic or unknown based spills. They are an excellent product for placing around spills to prevent them from spreading. These socks are also a key component in any spill kit.

**Super Absorbent Flake Socks**  
See this product in action on our website



**Key features**

- Will not become slippery even when fully saturated. Contains no poly-acrylate.
- No lint spun-bond outer sleeve.
- Contains 95% recycled content.
- Contains proprietary Super Absorbent Flake.
- 50% more absorbent than most competitor socks.
- Absorbs more and can stay on the job for longer which reduces costs.

**Notes**

- Ensure that disposal of these sorbents complies with all regulations.

\* Basis weights and recycled content are ± 5%

\*\* Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.

\*\*\* Weight per case ± 0.5 kg/lbs.

**Compliance**

Related Regulations	Description
29CFR 1910.22(a)(2) 29CFR 1910.120(j)(1)(vii)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition." "... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."