

FALL PROTECTION

Our selection represented the most popular fall protection equipments available. The vast variety of hazardous situations has taken the user to an upper level of knowledge of the required equipment for their specific needs. Sylprotec carries either horizontal, vertical and closed area systems.

Our harness selection is design to answer the worker's needs. Whether you need a light harness of a more sophisticated one: Sylprotec has it.

Straps with energy absorbers to minimize injuries when stopping. Life line device to keep a vital link whenever you are in a closed area, etc...



9291 Du Prado, St-Leonard Qc, H1P 3H1
Tel.: 514-388-5551, 1-866-580-5551, Fax: 514-388-2040
WWW.sylprotec.com, email: info@sylprotec.com

ROOFER'S KIT

FP20508

CODE	DESCRIPTION
FP10910	3M Safeligh harness, back D ring., small to X large
FP209510	3M 3 ft. long web lanyard with soft pak energy
FP160221-50	3M 5/8 lifeline Rope 50 ft. long 3 strand
FP129	3M Automatic rope grab with panic lock
FP4000	3M roof anchors
	6 in., galvanise nails (6 units)
	Whit storage bucket



FP4000



FP4004



FP4005

CODE	DESCRIPTION
FP4000	3M roof anchors
FP4004	3M D bolt anchor
FP4005	3M Anti-rollout d-bolt anchor

HARNESS FROM NORTH

FP700/1D



FP759/1D



FP81F/1DBA



FP722/2DP




FP722/6DP



FP80K

CODE	DESCRIPTION	SIZE
FP700/1D	North light weight nylon harness with back D-ring	S to XXL
FP700/1ED	North light weight nylon harness with extended back D-ring	S to XXL
FP722/2DP	North harness with 2 D-ring back and front, adjustable small to large (available in X large)	S to L
FP722/6D	North harness with 6 D-ring, adjustable small to large (available in X large)	S to L
FP759/1DP	North harness with back D-ring, adjustable small to large (available in X large)	S to L
FP759/5DP	North harness with back 5 D-ring, adjustable small to large (available in X large)	S to L
FP80K	North heavy duty harness whit soft pack 440 lb rate, with back D-ring	XXXL
FP81F/1DBA	North comfort harness model Rite-on, adjustable small to large	S to XXL

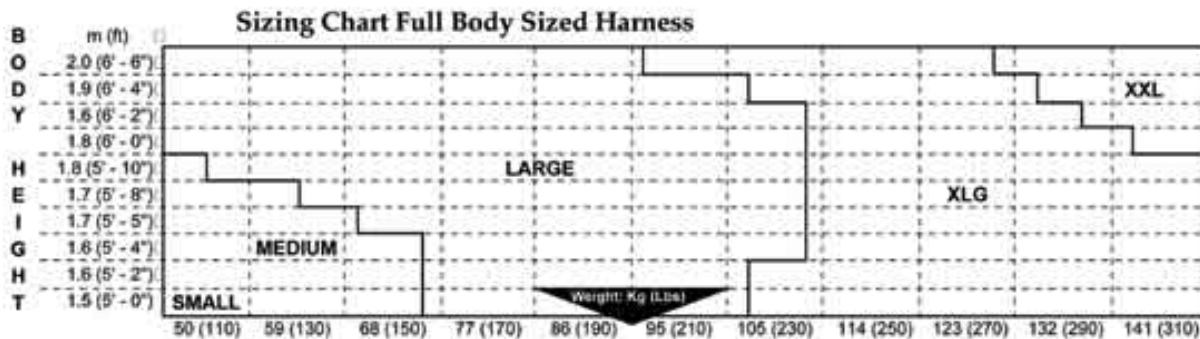

HARNESS FROM 3M

FP10210



FP10910



FP1410Q



FP1412Q



FP7512Q



FP1040-XXL



Belt size	Waist size
P-M	30 to 42 in.
G-TG	40 to 52 in.
TTG	45 to 57 in.

CODE	DESCRIPTION	SIZE
FP10210	3M Poly Nomex harness, with back D-ring, adjustable	S to XL
FP10910	3M harness model Safelight whit back D ring, adjustable	S to XL
FP1410Q	3M harness model Ameba quick connect whit back D ring, adjustable	S to XL
FP1412Q	3M harness model Ameba quick connect with belt for pouch tools and 3 D ring, adjustable	S to XL
FP1412Q-XL	3M harness model Ameba quick connect with belt for pouch tools and 3 D ring, adjustable	XL to XXL
FP7512Q	3M harness model Elevation quick connect with belt for pouch tools and 3 D ring, adjustable	S to XL
FP7512Q-XL	3M harness model Elevation quick connect with belt for pouch tools and 3 D ring, adjustable	XL to XXL
FP1040-XXL	3M harness model Apache heavy duty (400 lb)	XXL

ENERGY ABSORBING LANYARDS



FP22322



FP22329



FP2662GG



FP26329



FP28829

HOOKS



FP6650



FP5386

CODE	DESCRIPTION	SIZE	HOOK
FP22322	North nylon web lanyard 1 po. (25 mm) with soft pak energy	4 feets or 6 feets	FP6650
FP22329	North nylon web lanyard 1 po. (25 mm) with soft pak energy	4 feets or 6 feets	FP6650/FP5386
FP26322	North web lanyard 1 3/4 po. (45 mm) with soft pak energy	4 feets or 6 feets	FP6650
FP26329	North web lanyard 1 3/4 po. (45 mm) with soft pak energy	4 feets or 6 feets	FP6650/FP5386
FP2662GG	North " Y" web lanyard 1 3/4 po. (45 mm) with soft pak energy	4 feets or 6 feets	FP6650/FP5386
FP28829	North decelerator energy absorbing lanyard	4 feets or 6 feets	FP6650/FP5386
FPD2991GG	North " Y" decelerator energy absorbing lanyard	4 feets or 6 feets	FP6650/FP5386

Most lanyards are available in 4 feets or 6 feets.

To order 6 feets you must add on the code (- 6)

Exemple: # FP22322-6 North nylon web lanyard 1 po. (25 mm) with soft pak energy, 6 feets long.

CARABINERS, ROPES GRABS & ROPES



FP86

CODE	DESCRIPTION
FP86	Autolocking carabiner, steel, 3/4 in. (19 mm) opening
FP88	Autolocking carabiner, steel, 1 in. (25 mm) opening



FP88


- * Vertical anti-fall system C.S.A. approved.
- * For 16 mm web rope.
- * Panic lock.
- * Automatic locking.



FP541



FP542



FP561

CODE	DESCRIPTION
FP541	Automatic rope grab with panic lock
FP542	Automatic rope grab with panic lock, soft pack energy absorber lanyard 2 ft. (0.6 m)
FP561	Automatic rope grab with parking feature

FP16EPS



CODE	DESCRIPTION	MATERIAL	TRACTION RESISTANCE
FP16EPS	Rope 5/8 po. (16 mm) 3 strands 25 ft.	Copolymer mix	2268 kg (5000 lbs.)
FP16EPS-50	Rope 5/8 po. (16 mm) 3 strands 50 ft.	Copolymer mix	2268 kg (5000 lbs.)
FP16EPS-100	Rope 5/8 po. (16 mm) 3 strands 100 ft.	Copolymer mix	2268 kg (5000 lbs.)

WEB LANYARDS

- * Retractable and extendable mechanism following the worker's movements.
- * C.S.A. and ANSI approved.



FPREW-23

3M Reload retractable cable stainless steel and modified nylon casing designed for lasting performance. Available in 3 sizes 7, 12 and 23 ft.

FPREC

New technology helps protect the 3M Sealed ReLoad Retractable Lanyards against the damaging effects of corrosion, making it a suitable choice for harsh marine environments. The innovative, modular design provides consistent performance and allows on-site inspection and servicing to reduce downtime and maintenance costs. Available in 4 sizes 30, 50, 85 and 130 ft.



CODE	DESCRIPTION
FPREW	Retractable 3M Reload Web, 7 ft. long
FPREW-12	Retractable 3M Reload Web, 12 ft. long
FPREW-23	Retractable 3M Reload Web, 23 ft. long
FPREC	Sealed self-retracting lanyard Reload 3M, 30 ft. long
FPREC-50	Sealed self-retracting lanyard Reload 3M, 50 ft. long
FPREC-85	Sealed self-retracting lanyard Reload 3M, 85 ft. long
FPREC-130	Sealed self-retracting lanyard Reload 3M, 130 ft. long

TRIPOD & LIFELINES



FP2/415SR

- * 3-way retractable lifeline, (fall protection, to lift people up and down).
- * 5 mm stainless steel or galvanized rope.
- * Load indicator : indicating system when undergoing over 295 kg (650 lbs).
- * Ring gear and pinion 4,5:1 ratio, recovery 25 ft./min.
- * Meets or exceeds ANSI, OSHA, CSA et CE requirements.
- * Available in 15 or 33 m. (50 or 108 ft.), galvanized or stainless wire.

- * Lifeline support.



FP6610/15

- * Made of tubular aluminum, lightweight and better resistance.
- * Moulded alloy head equipped with centered pulley for steel cable.
- * Eliminates needs of additional pulley end gives more space for the victim.
- * 2 eyed-bolts head allowing use of a lift.
- * Maximum weight 136 kg (300 lbs).
- * Equipped with chains to reinforce quartering resistance.
- * ANSI et OSHA approved.



CODE	DESCRIPTION
FP2/415SR	3 ways lifeline, 3/16 in. (5mm) stainless, 50 ft.(15m), weight 9.5 kg (21 lbs.)
FP6610/15	Lifeline, FP2 type
FP6630/7	Tripod carrying bag
FP6600/7	Aluminum 7 ft. tripod
FP66/415SR	Kit including: FP2/415SR, FP6600/7, FP6610/15, FP6630/7