

INDUSTRIAL PRODUCTS

Convex mirrors

To make sure to be seen and to see any dangers around, the installation of a convex mirror is vital. Sylprotec offers different sizes and forms of convex mirrors. Without any doubts you will find the one to suit your needs.



Anti-tiredness carpet

Is the hardness of the floor causing you leg pain or low back pain? If so, you will be interest by our anti-tiredness carpets.

Anti-tiredness carpet are separate in 2 groups; for dry areas and for wet areas. Moreover, the choice of different materials will assure you of a great durability.

Removable screens

Sylprotec removable screens selection includes; screen with insulating strap of the cold, welding screens and tailored made removable curtains. Removable curtains can be install either from the ceiling of from the floor. Moreover, the great selection of materials will answer the most extreme requirements. Materials are made of vinyl, flame resistant cotton, kevlar and aluminized kevlar.

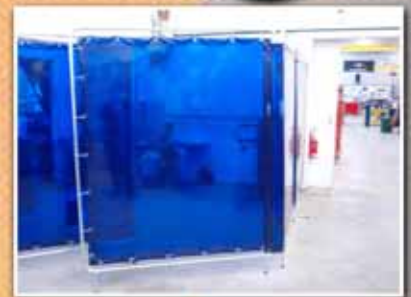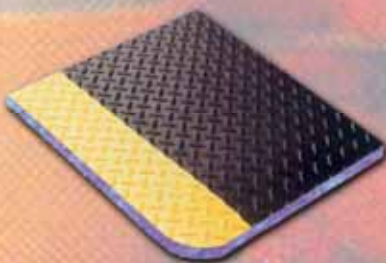

9291 Du Prado, St-Leonard Qc, H1P 3H1
Tel.: 514-388-5551, 1-866-580-5551, Fax: 514-388-2040
WWW.sylprotec.com, email: info@sylprotec.com

ACRYLIC MIRRORS

To maximize security at a glance. Safety mirrors dome 360 °, 180 ° or 90 °, reduce the risk of accidents due to blind corners in your warehouse or factory. Made very sturdy and durable acrylic. All mirrors have a black protective edge. Ideal locations: 360 ° 4-way intersections, T-junctions 180 °, 90 ° angle intersections



CODE	DESCRIPTION	DIAMETER
M86	Hemispheric mirror 360°	18 in.
M86-24	Hemispheric mirror 360°	24 in.
M86-33	Hemispheric mirror 360°	33 in.
M86-48	Hemispheric mirror 360°	48 in.

CODE	DESCRIPTION	DIAMETER
M88	Hemispheric mirror 180°	18 in.
M88-24	Hemispheric mirror 180°	24 in.
M88-33	Hemispheric mirror 180°	33 in.
M88-48	Hemispheric mirror 180°	48 in.



CODE	DESCRIPTION	DIAMETER
M89	Hemispheric mirror 90°	18 in.
M89-24	Hemispheric mirror 90°	24 in.
M89-33	Hemispheric mirror 90°	33 in.
M89-48	Hemispheric mirror 90°	48 in.


CONVEX MIRROR FOR INSIDE OR OUTSIDE

CODE	DESCRIPTION	DIAMETER
M64	Acrylic convex interior mirror	12 in.
M64-18	Acrylic convex interior mirror	18 in.
M64-26	Acrylic convex interior mirror	26 in.
M64-30	Acrylic convex interior mirror	30 in.
M64-36	Acrylic convex interior mirror	36 in.



These convex mirrors, acrylic light help to surveillance and the prevention of accidents. Each mirror includes adjustable mounting brackets. Viewing angle of 100 ° and pivot mounting ball. The telescopic arm adjusts from 15 "to 21". To the inside or outside.

ANTI-TIREDNESS CARPETS

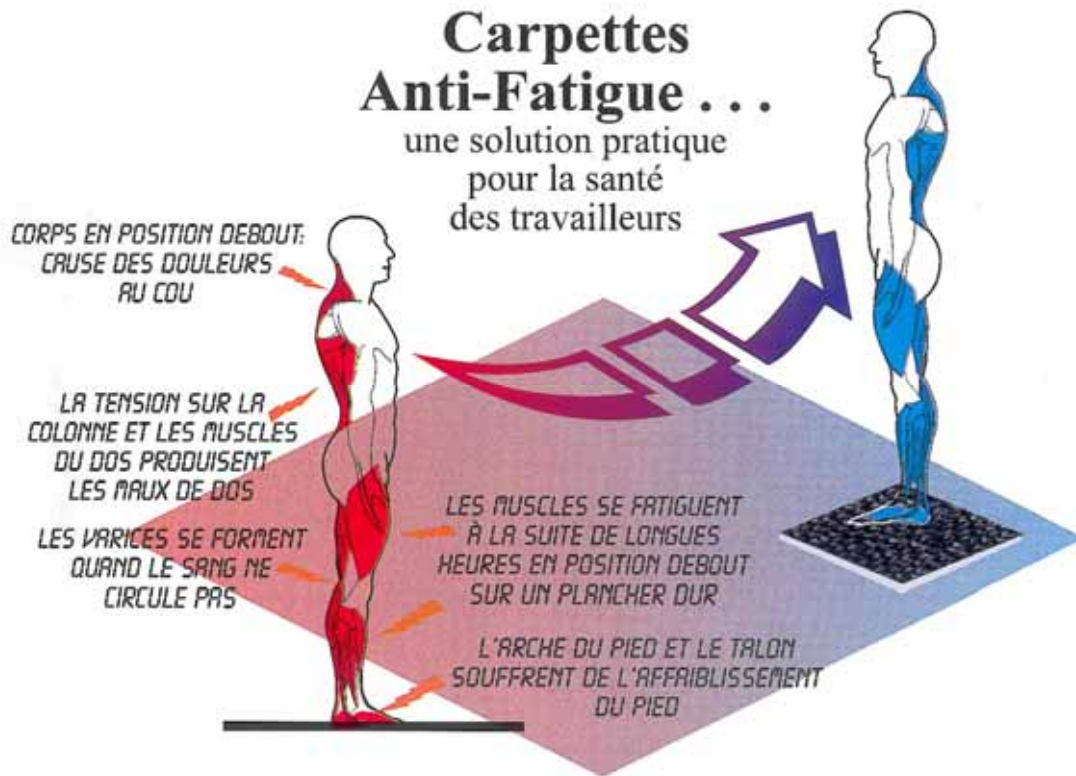

Studies made at Michigan University, ergonomics department, showed that tiredness caused by long periods of standing up have heavily injured workers whom are suffering painful consequences. Furthermore, this caused billions of dollars due to a lower productivity, absenteeism and an increase in insurance premiums for employees and companies.

PROBLEM

One of the most common cause of physical tiredness is standing up on hard floor for long periods of time. The tension applied to the neck, legs and to the arch of the foot has a direct impact on worker's health and productivity.

- ◆ Compressed muscles and articulations.
- ◆ Slowed down blood flow.
- ◆ Neck and low back tension.
- ◆ Varicose veins.
- ◆ Heel and foot arch pain.

The heart must work more causing a general loss of energy and reducing working capacities. Michigan university's study reveals that 83% of United States industrial labour had foot & leg problems and that 15% of declared injuries were caused by chronic problems affecting end of limbs and that most of these events are related to long standing up periods.

SOLUTION

Study made on premises revealed an important correlation between surface condition and worker's productivity. The more the surface is comfortable the less the worker suffers from tiredness.

- ◆ The softness stimulates the leg muscles
- ◆ It maintains a normal blood flow.
- ◆ The improvement in the blood flow reduce pain and discomfort.
- ◆ Minimize tiredness and tension, more specifically in the neck and lower back.

After many years of researches and tests, we have developed an anti-tiredness carpet kit likely to answer all of the industry needs as well as the worker's comfort.

ANTI-TIREDNESS CARPETS & NON-SKID BANDS

NON-SKID BANDS

- * Self-adhesive band, recurrent surface.
- * Pre-cut bands, 50 per box.
- * Available in black only.
- * Available in roll or pre-cut bands.
- * Can be installed on metal, concrete and wood.
- * Exterior or interior installation.
- * Resistant to most of the common chemical products.



CODE	BAND'S DIMENSIONS	Box of
PIAS	Band 3/4 in. X 24 in.	50
PIAS-5.5	Band 5 1/2 in. X 5 1/2 in.	50
PIAS-6	Band 6 in. X 24 in.	50

CODE	ROLL'S DIMENSIONS
PIA	Roll 1 in. X 60 ft.
PIA-02	Roll 2 in. X 60 ft.
PIA-03	Roll 3 in. X 60 ft.
PIA-04	Roll 4 in. X 60 ft.
PIA-06	Roll 6 in. X 60 ft.
PIA-12	Roll 12 in. X 60 ft.



COMFORT-KING

- * 1/2 in. carpet made of 100% Zedlan.
- * Granular, extremely abrasive and anti-skid surface.
- * Static electricity dissipater 10⁹.
- * Bevelled edge to reduce tripping risks.
- * Choice of 3 colors: black, steel grey and royal blue.
- * Available in roll and carpet.
- * Softer than vinyl even at low temperature.
- * More resistant than vinyl and other stratified surfaces.

Other dimensions available upon request.

Other colors available. Add G for grey or B for blue.

CODE	CARPET'S DIMENSIONS
PIK	Carpet 2 ft. X 3 ft. black
PIK-35	Carpet 3 ft. X 5 ft. black
PIK-36	Carpet 3 ft. X 10 ft. black

CODE	ROLL'S DIMENSIONS
PIK-37	Roll 3 ft. X 60 ft. black
PIK-48	Roll 4 ft. X 60 ft. black
PIK-PI2	Tailored made carpet, square foot black

SPECIAL CARPETS

WORKER`S DELIGHT DECK PLATE

- * Reverse side amalgamate with Zedlan.
- * Thickness: 3/8 or 1/2 in. Zedlan.
- * Remains flexible in cold weather.
- * Scattered diamonds pattern for better grip.
- * Carpet is more mellow, flexible and has more grip.
- * Yellow coloured edges.



Other dimensions available upon request:

CODE	CARPET'S DEMENSIONS
PIP	Carpet 3/8 in. X 2 ft. X 3 ft. black
PIP-35	Carpet 3/8 in. X 3 ft. X 5 ft. black
PIP-312	Carpet 3/8 in. X 3 ft. X 12 ft. black

CODE	ROLL'S DIMENSIONS
PIP-260R	Roll 1/2 in. X 2 ft. X 60 ft. black
PIP-360R	Roll 1/2 in. X 3 ft. X 60 ft. black
PIP-460R	Roll 1/2 in. X 4 ft. X 60 ft. black

SAFEWALK LIGHT

- * 1/2 in. Vulcanized rubber carpet with cylindrical flow openings and rising grooves.
- * All sides bevelled.
- * Available colors: Black (general purpose), brick red (grease resistant).




CODE	DESCRIPTION
PIS	Carpet 1/2 in. X 3 ft. X 5 ft. black
PISL-31	Carpet 1/2 in. X 3 ft. X 10 ft. black
PISL-32	Carpet 1/2 in. X 3 ft. X 20 ft. black

Replace N with the letter corresponding to the color: R for red, G for gray.

CURTAINS

DO IT YOURSELF

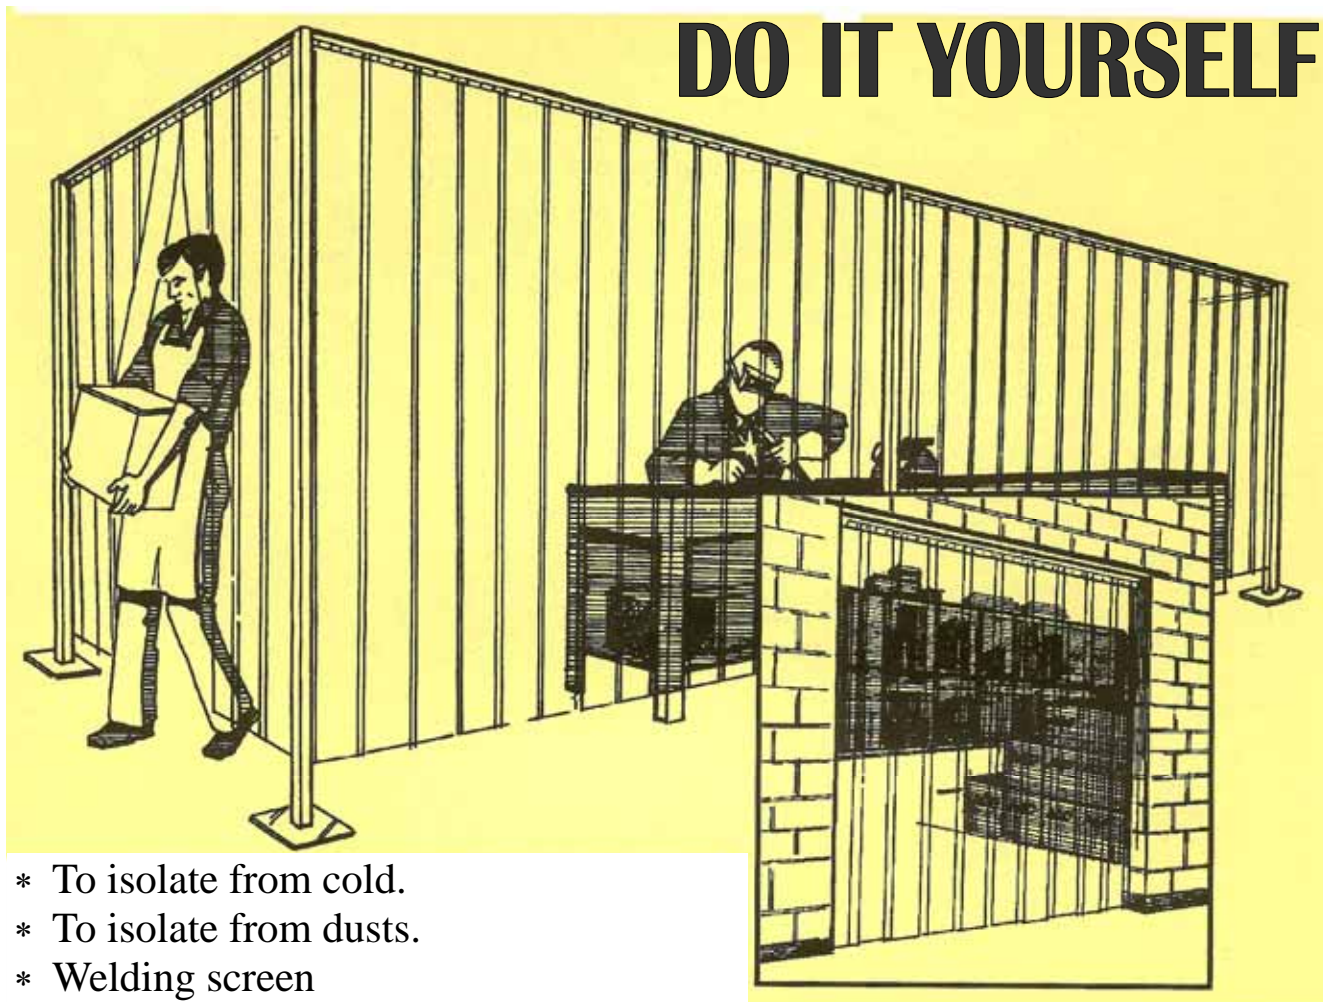

- * To isolate from cold.
- * To isolate from dusts.
- * Welding screen
- * 2 types of thickness available.
- * 3 sizes of band width.

Bands come with a 90° steel band of 2 in. X 2 in. X 3/16 in., centered holes every 2 in.. Otherwise, order a 1/4 in. plate bar with centered holes every 2 in. Bolts, nuts & joints are included. You only have to specified the desired length.

CODE	SIZE	MATERIALS
AGVS112C	6 in. X 60 mil.	Clear vinyl 2 in. overlap
AGVS222C	8 in. X 80 mil.	Clear vinyl 2 in. overlap
AGVS224C	8 in. X 80 mil.	Clear vinyl 4 in. overlap
AGVS324C	12 in. X 80 mil.	Clear vinyl 4 in. overlap
AGVS326C	12 in. X 80 mil.	Clear vinyl 6 in. overlap



CURTAIN'S FABRICS



**CONTACT
SYLPROTEC
FOR
ESTIMATE**

PVC vinyl sheet 14 mil., flame resistant, meets CPAI-84 Fire Marshall's of California standards, registration #F191. These transparent vinyl sheets exceeds OSHA standards. Sold in ft².

Ideal Tig & Mig welding station.

This fabric is especially formulated to absorb dangerous ultraviolet rays and to avoid flashes.

CODE	THICKNESS	COLOR
AGFC001	14 mil	Yellow
AGFC002	14 mil	Orange
AGFC003	14 mil	Blue
AGFC004	14 mil	Green
AGFC005	14 mil	Green grade 8

This series let the light go thru at 100%. Ideal for confined machinery and where particulates may be thrown. Resistant to: flame, water, grease, oil and most common acid .

Not to be used as welding screen.

CODE	THICKNESS	COLOR
AGFC007	16 mil	Clear
AGFC008	20 mil	Clear
AGFC009	40 mil	Clear

On regular curtains vinyl hooks are placed every 12 in.
When ordering you must specified if you want hooks on top or on contour.

ACCESSORIES	
AGCG001	Hook for curtain (tube 1 in. X 2 in.)
AGCG002	Hook for curtain, roll or tube 7/8 in.
AGCG003	S hook (for 1/4 in. de diameter)
AGCG004	« see thru » Repair kit (12 in. X 24 in.) specify color

**To determine the number
of hooks needed:
add 1 to the size of curtain.
ex: 10 feets = 11 hooks**



** Other type of fabrics: from vinyl to Kevlar.*

POST MOUNTING CURTAINS

ALL NECESSARY PARTS INCLUDED

- * To isolate from dusts.
- * Welding screen.
- * Different materials available.
- * Vinyl 14 mil, clear, yellow, orange, blue and black.
- * Vinyl 16, 20 et 40 mil clear.
- * Cotton 10, 15 et 20 oz.
- Flame resistant.
- * Any many more....

**CONTACT
SYLPROTEC
FOR ESTIMATE**

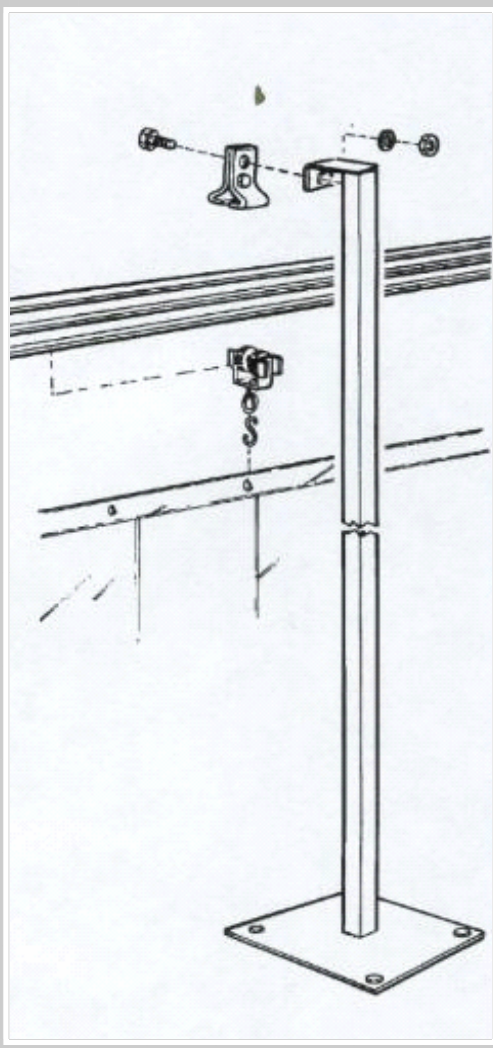

AGCG106

- * To tie length to support on their entire distance.



AGCG102

- * Nylon castors with S hook.
- * Riveted castors to steel frame.




AGCG100

- * Extra durable rail, aluminum 0.125.
- * 1 in. de width X 2 1/2 in. height.
- * Maximum length of 10 feet.



AGCG101

- * Curved at 90°, extra durable aluminum 0.125.
- * 4 feet long.



AGCG107

- * Wall fastenings to attach pole to wall.



AGCG104

- * Extra durable steel fastening to attach pole.



AGCG110

- * 2 in. X 2 in. extra durable post.
- * Base every 10 feet of rail.
- * Specify size when ordering.



9291 Du Prado, St-Leonard Qc, H1P 3H1
Tel.: 514-388-5551, 1-866-580-5551, Fax: 514-388-2040
WWW.sylprotec.com, email: info@sylprotec.com

2014-02-04

SUSPENDED MOUNTING CURTAINS

ALL NECESSARY PARTS INCLUDED




AGCG108

- * Extra durable ceiling fastener allows a closer mounting to the ceiling.




AGCG104

- * Extra durable steel fastening to attach pole.



AGCG107

- * Wall fastenings to attach pole to wall.

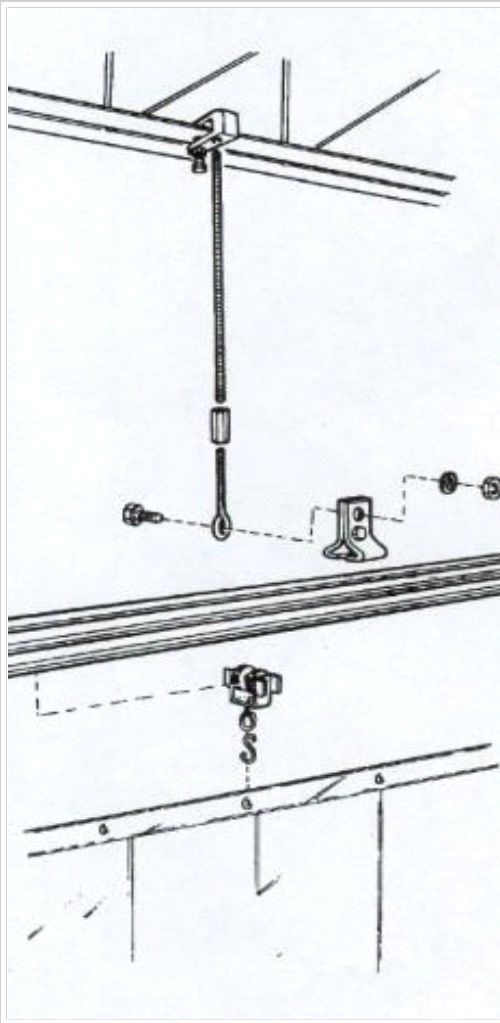

AGCG112

- * C fastening, accept threaded rods to fix rail at the right height.



AGCG114

- * Steel threaded rod 3/8 in.
- * Rod every 10 feet of rail.



AGCG116

- * 3/8 in. adaptor to join threaded rod to threaded hook.



AGCG118

- * Threaded hook.



AGCG102

- * Nylon castors with S hook.
- * Riveted castors to steel frame.




AGCG100

- * Extra durable, aluminum 0.125.
- * 1 in. width X 2 1/2 in. height .
- * Maximum length of 10 feet.



AGCG101

- * Curved at 90°, extra durable aluminum 0.125.



AGCG106

- * To tie length to support on their entire distance.

WELDING SCREEN


- * **Made of vinyl especially design to avoid flashes.**
- * **Offered in different colors: yellow, blue and clear.**
- * **Possibility to add castors.**
- * **Easy assembly, made of steel tubes.**
- * **Available in different sizes: single, double, triple or quadruple panels.**
- * **Another size available.**



CODE	PAN.	SIZE OF PANEL
AGP54	1	Simple panel welding screen, 5 feet high X 4 feet large, (choice of vinyl)
AGP54-2	2	2 panels welding screen, 5 feet high X 4 feet large, (choice of vinyl)
AGP54-3	3	3 panels welding screen, 5 feet high X 4 feet large, (choice of vinyl)
AGP54-4	4	4 panels welding screen, 5 feet high X 4 feet large, (choice of vinyl)
AGP56	1	Simple panel welding screen, 5 feet high X 6 feet large, (choice of vinyl)
AGP56-2	2	2 panels welding screen, 5 feet high X 6 feet large, (choice of vinyl)
AGP56-3	3	3 panels welding screen, 5 feet high X 6 feet large, (choice of vinyl)
AGP56-4	4	4 panels welding screen, 5 feet high X 6 feet large, (choice of vinyl)
AGP58	1	Simple panel welding screen, 5 feet high X 8feet large, (choice of vinyl)
AGP58-2	2	2 panels welding screen, 5 feet high X 8 feet large, (choice of vinyl)
AGP58-3	3	3 panels welding screen, 5 feet high X 8 feet large, (choice of vinyl)
AGP58-4	4	4 panels welding screen, 5 feet high X 8 feet large, (choice of vinyl)
AGP68	1	Simple panel welding screen, 6 feet high X 8 feet large, (choice of vinyl)
AGP68-2	2	2 panels welding screen, 6 feet high X 8 feet large, (choice of vinyl)
AGP68-3	3	3 panels welding screen, 6 feet high X 8 feet large, (choice of vinyl)
AGP68-4	4	4 panels welding screen, 6 feet high X 8 feet large, (choice of vinyl)
AGPR		Castors for welding screen, (2)

WELDING SCREEN


Single Panel Portable Safety Screen

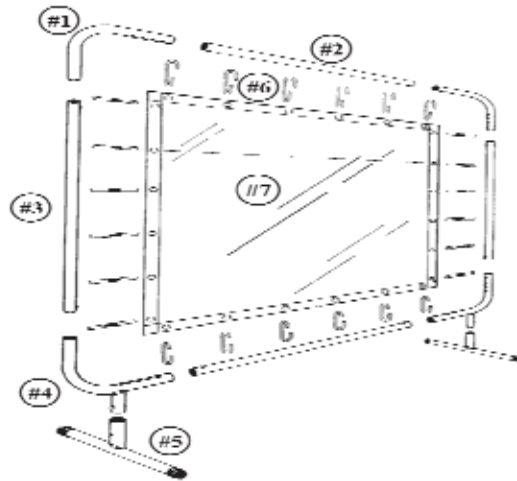

- #1 Top elbow (2)
- #2 Horizontal side (2)
- #3 Vertical side (2)
- #4 Base elbow with short stub (2)
- #5 Tee leg (2)
- #6 Hooks (qty varies with curtain model)
- #7 Curtain (1)


**Castors Optional*

Two Panel Portable Safety Screen

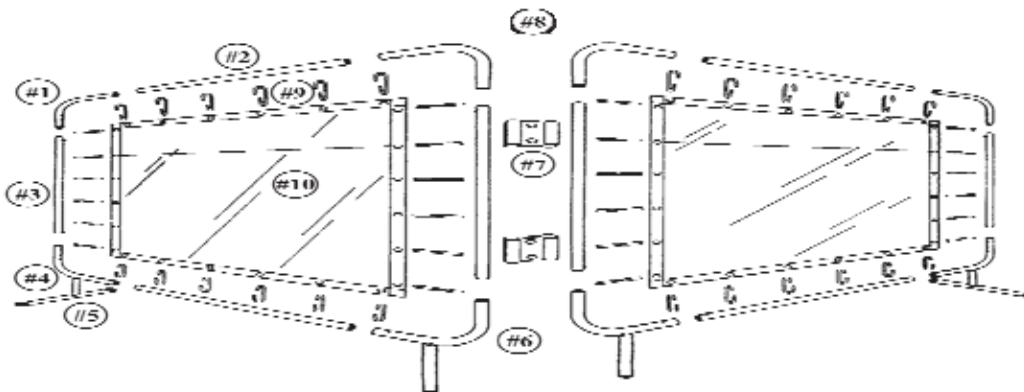

- #1 Top elbow (4)
- #2 Horizontal side (4)
- #3 Vertical side (4)
- #4 Base elbow with short stub (2)
- #5 Tee leg (2)
- #6 Base elbow with long stub (2)
- #7 Hinges (2)
- #8 Corner curtains (not shown) (1)
- #9 Hooks (qty varies with curtain model)
- #10 Curtain (2)


**Castors Optional*

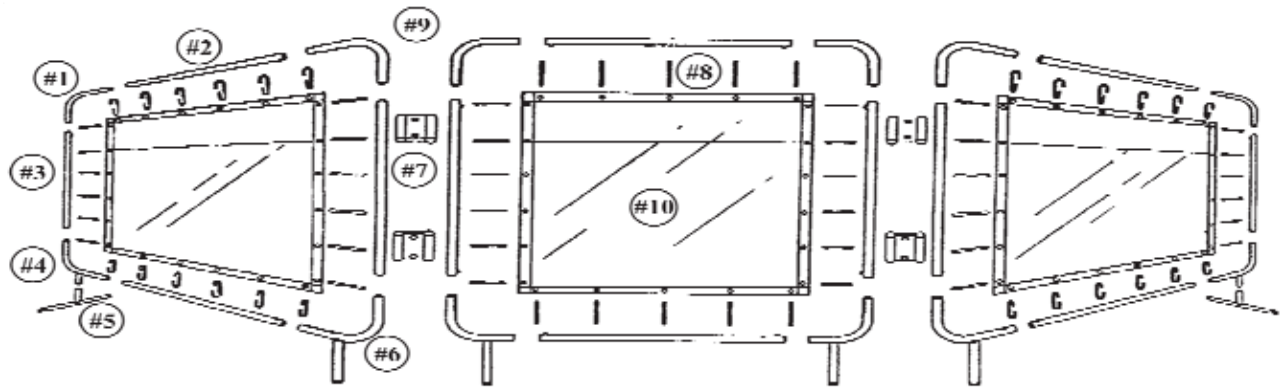

- #1 Top elbow (6)
- #2 Horizontal side (6)
- #3 Vertical side (6)
- #4 Base elbow with short stub (2)
- #5 Tee leg (2)
- #6 Base elbow with long stub (4)
- #7 Lingers (4)
- #8 Hooks (qty varies with curtain model)
- #9 Corner curtain (not shown) (2)
- #10 Curtain (3)

*Castors Optional

Full-text articles are available at www.sagepub.com

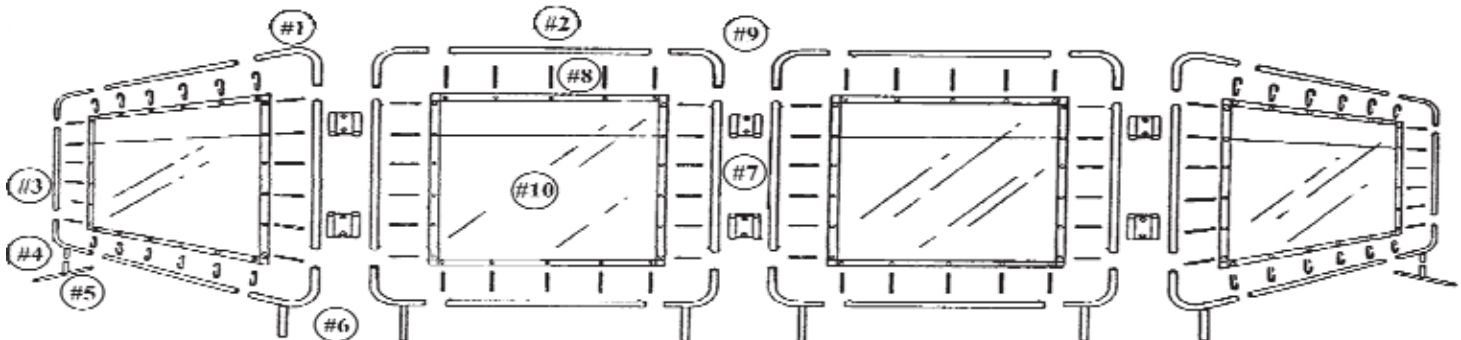

- ```
#1 Top Elbow (8)
#2 Horizontal Side(8)
#3 Vertical Side(8)
#4 Base elbow with short stub (2)
#5 Tee leg (2)
#6 Base elbow with long stub (6)
#7 Hinges (6)
#8 Hooks (qty varies with curtain model)
#9 Corner curtain (not shown) (3)
#10 Curtain (4)
```

\*Castors Optional

[Wladimir@math.uchicago.edu](mailto:Wladimir@math.uchicago.edu) [www.math.uchicago.edu/~wladimir](http://www.math.uchicago.edu/~wladimir)